

29 April 2025

Dittmer delivers more gold, BMR reviewing processing options.

HIGHLIGHTS

- Results for Stage 5 drilling at Dittmer continue to demonstrate the continuity of the newly recognised extension of the Duffer Lode.
- All eight holes completed to date have hit the Duffer Lode extension in line with the model with significant veining observed¹.
- Assay results for the first three holes have delivered further significant results including:
 - **2.5m @ 6.88 g/t Au, 3.0 g/t Ag & 0.15% Cu including**
1.5m @ 11.08 g/t Au, 4.65 g/t Ag & 0.24% Cu including
0.7m @ 22.64 g/t Au, 9.03 g/t Ag & 0.35% Cu
- Further assay results and metallurgical test results expected in coming weeks.
- Ballymore is exploring potential future processing options within trucking distance of Dittmer – initial discussions held.



Ballymore Resources (ASX:BMR) continues to intersect gold mineralisation at its flagship Dittmer Project in North Queensland after the first eight holes of its Stage 5 drilling all intersected the displaced extension of the Duffer Lode, which was historically mined at the high-grade Dittmer mine.

Ballymore's four previous drilling campaigns at Dittmer demonstrated the excellent continuity of the faulted extension with 42 out of 42 holes returning gold mineralisation, highlighted by a 193.45g/t intersection over 0.3m. The Duffer Lode produced over 54,500 oz gold at an average grade of 151 g/t Au, 66 g/t Ag and 2.8% Cu (after hand-sorting) between 1935 and 1951.

Ballymore Managing Director, Mr David A-Izzeddin, said:

"Amid record high gold prices, Ballymore's latest drill program advances the option of starting a low CAPEX high-grade gold mine and to this end, the Company has held preliminary discussions with a number of operations which could potentially process Dittmer's ore in future.

Stage 5 drilling further confirms our geological model and increases the confidence in our exploration strategy. We look forward to assay results for the rest of the drill holes."

¹ **Cautionary statement:** Visual estimates of mineral abundance should never be considered a proxy or substitute for laboratory analyses where concentrations or grades are the factor of principal economic interest. Visual estimates also potentially provide no information regarding impurities or deleterious physical properties relevant to valuations.

Dittmer Stage 5 Underground Drilling

The Stage 5 campaign continues to demonstrate the continuity of the newly recognised lode structure at Dittmer with all eight holes completed to date intersecting the lode structure and associated quartz-pyrite-chalcopyrite veining, in line with the model. A summary of significant drill intersections for the first three holes (DTDD049 – 051) is included in Table 1 below.

Assay results for the first three holes have delivered significant results including:

- **2.5m @ 6.88 g/t Au, 3.0 g/t Ag & 0.15% Cu including**
1.5m @ 11.08 g/t Au, 4.65 g/t Ag & 0.24% Cu including
0.7m @ 22.64 g/t Au, 9.03 g/t Ag & 0.35% Cu

The current program is focused on infilling mineralisation recognised at Dittmer as well as step-out drilling, with the intention of achieving sufficient drill coverage to estimate a preliminary Mineral Resource for the project as well as completing preliminary mining scoping studies. This area had never been drill-tested prior to Ballymore commencing exploration.

Drill core samples have also been sent for a second round of metallurgical testwork and results for this second metallurgical study are expected in the coming weeks. Previous metallurgical testwork, in October 2023 showed excellent recoveries via both cyanide leach and floatation methods, providing excellent optionality for potential treatment arrangements.

Table 1 – Summary of Stage 5 Assay results to date.

Cut-Off (Au g/t)	Hole	From	To	Interval (m)	Au (g/t)	Ag (g/t)	Cu (%)
0.1	DTDD049	142.50	149.00	6.50	2.805	1.24	0.06
0.5	Including	146.50	149.00	2.50	6.882	3.06	0.15
1.0	Including	147.50	149.00	1.50	11.080	4.65	0.24
5.0	Including	148.30	149.00	0.70	22.642	9.03	0.35
0.5	DTDD049	152.10	152.60	0.50	0.670	0.15	0.00
0.1	DTDD050	147.00	156.00	9.00	0.346	0.6	0.03
0.5	Including	151.00	153.00	2.00	0.851	0.9	0.08
1.0	DTDD050	186.50	187.00	0.50	1.145	0.91	0.04
0,1	DTDD051	153.50	160.00	6.50	0.717	0.8	0.05
0.5	Including	153.50	156.70	3.20	1.297	1.3	0.08
1.0	Including	153.50	154.20	0.70	5.220	4.5	0.21

Ballymore's previous four drilling campaigns at Dittmer returned bonanza gold intersections including:

- **DTDD009A**: 4.3m @ 29.02 g/t Au from 118.4m including 0.5m @ 171.83 g/t Au from 120.15m²
- **DTDD019**: 3.85m @ 26.03 g/t Au from 212m including 1.15m @ 68.73 g/t Au from 213.85m³
- **DTDD034**: 3.0m @ 19.50 g/t Au from 88m including 0.55m @ 104.33 g/t Au from 88.8m⁴
- **DTDD040**: 8.0m @ 8.36 g/t Au from 191.3m including 0.3m @ 193.45 g/t Au from 197.5m⁴

Drilling of the Stage 5 drill program continues to deliver with all holes intersecting the targeted lode structure and results now received for the first three holes of the program (DTDD049 – 051).

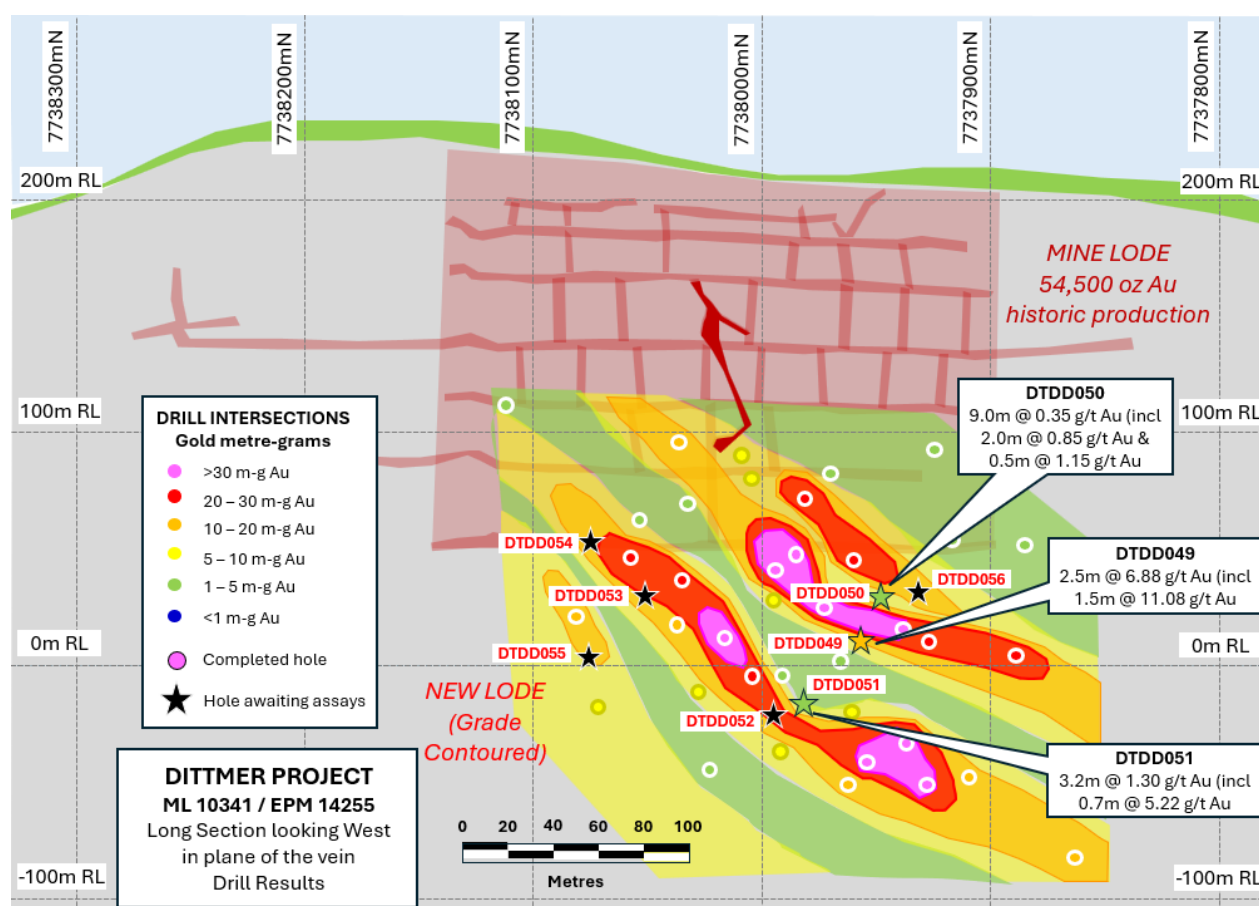


Figure 1 – Long section looking west rotated perpendicular to the lode with the locations of previous drill holes (dots) and Stage 5 drill holes (stars). Black stars denote holes completed with assays pending. The displaced lode extension is contoured by metre-grams gold.

² Refer to ASX announcement “Assay Results confirm High-Grade Gold-Copper Discovery at Dittmer”, released 19th July 2022

³ Refer to ASX announcement “New bonanza gold grades validate planned Dittmer Mine reopening study”, released 2nd May 2023

⁴ Refer to ASX announcement “Dittmer Stage 4 drilling delivers 193 g/t Au intersection”, released 9th May 2024

DTDD049: intersected altered volcanics before encountering a stockwork zone of laumontite-carbonate veining at 130 – 139.3m and then a shear zone at 146.6 – 152.6m that hosts numerous 5 – 15mm quartz-pyrite-chalcopyrite veins which corresponds with the modelled Displaced Lode. Assays have reported 2.5m @ 6.88 g/t from 146.5m (including 1.5m @ 11.08 g/t Au from 147.5m, including 0.7m @ 22.64 g/t Au from 148.3m) associated with this shear zone.



Figure 2 – Close-up of 15mm quartz-chalcopyrite-pyrite vein at 148.5 – 148.6m in DTDD049



Figure 3 – Core tray exhibiting the greater Displaced Lode structure in DTDD049 (146.4 – 149.3m).

DTDD050: intersected altered volcanics before encountering a shear zone from 147 – 156m including fine (1-5mm) pyrite-chalcopyrite veins from 151 – 153.5m. The hole intersected the Displaced Lode at 153.5 – 154.1m, comprising a 40mm quartz-pyrite-chalcopyrite vein and other secondary veins. The hole then entered andesite overprinted by fine (<2mm) pyrite-chalcopyrite veins from 154.1 – 155.6m. The drill hole intersected a broad low-grade intersection of 9.0m @ 0.346 g/t Au from 147m.



Figure 4 – Examples of mineralisation in DTDD050; (A) Core tray exhibiting the greater Displaced Lode structure; (B) Close-up of the quartz-pyrite-chalcopyrite veins up to 40mm in phyllic altered andesite.

DTDD051: intersected altered volcanics and a number of dolerite / andesite dykes before intersecting a shear zone from 153.6 – 160m including a 50mm quartz-pyrite-chalcopyrite vein at 154.0m and a 100mm carbonate-quartz-pyrite vein with buff alteration selvage at 156.3m which is interpreted to be the Displaced Lode. Both veins were associated with a more altered and intensely shear zone with increased sericite selvage around the veins. The shear zone reported a broad low-grade intersection of 6.5m @ 0.717 g/t Au from 153.3m, including 3.2m @ 1.297 g/t Au from 153.5m and 0.7m @ 5.22 g/t Au from 153.5m.

A second zone of mineralisation was intersected from 187 – 187.8m and presented as a shear zone, overprinted by carbonate-pyrite stringer veins and a strong buff alteration halo surrounding the shear. A 100mm carbonate-pyrite vein was intersected within the shear at 187.3m. This vein reported 0.8m @ 0.363g/t Au from 187m.

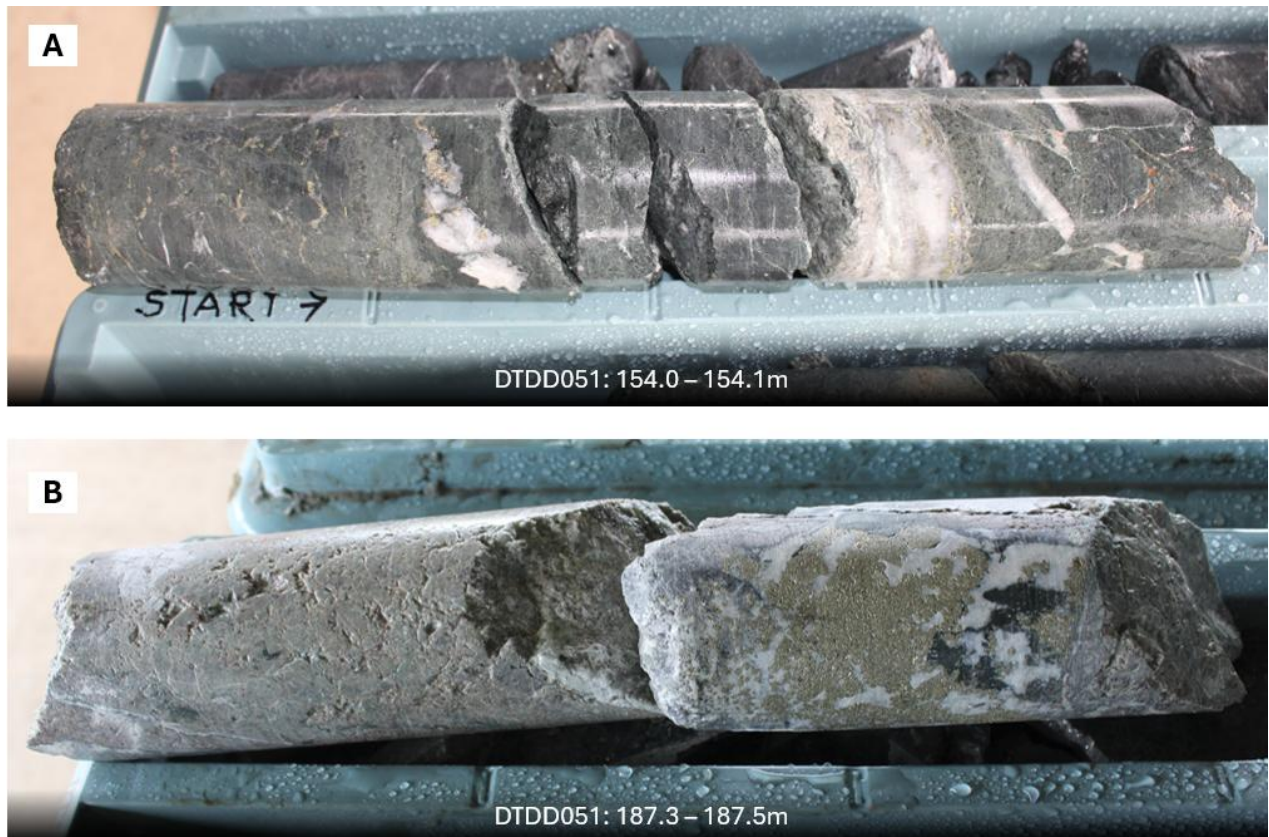


Figure 5 – Examples of mineralisation in DTDD051. (A) 50mm quartz-pyrite-chalcopyrite vein at 154.0m; (B) 100mm carbonate-quartz-pyrite vein with buff alteration selvage at 187.3m.

Mineralisation in the faulted extension of the lode is interpreted to host a series of south-dipping high-grade shoots and current drilling supports this interpretation (Figure 1 & 6). In addition, drilling continues to intersect abundant chalcopyrite stringer veins in shear zones. These are interpreted to be a potential indicator of an underlying porphyry copper deposit.

This interpretation is further supported by the airborne magnetic survey and subsequent modelling completed by Ballymore in 2024⁵. 3D modelling of the magnetic data has highlighted a pipelike magnetic body down-plunge from the historic Dittmer mine. This feature is interpreted to represent a pencil-like magnetite-bearing intrusion or the top of a hydrothermal system of magnetite-bearing ore around a porphyry intrusion. Many porphyry systems in Eastern Australia have a similar pencil-like geometry, forming “finger” or “pencil” porphyries that are vertically extensive but horizontally discrete.

⁵ Refer to ASX announcement “Magnetic survey identifies significant new gold-copper target underneath high-grade Dittmer mineralisation”, released 8th October, 2024

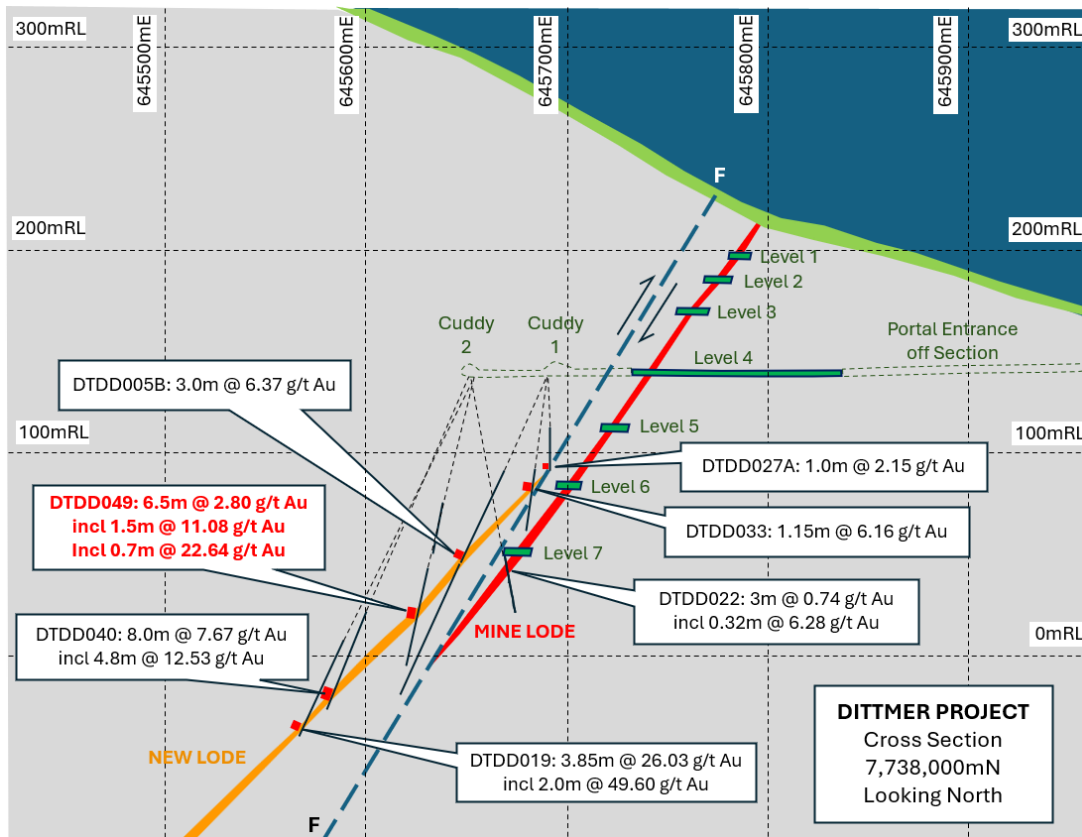


Figure 6 – Dittmer Cross Section 7,738,000mN looking north showing historic workings (green), historically mined lode (red) and the displaced new lode repetition (orange) and drill traces.

Drilling continues at Dittmer and Ballymore has already completed holes DTDD052 – 056 with results pending. All of these holes have, based on visual analysis of the drill cores, intersected the displaced Duffer Lode structure, in line with the model, encountering significant quartz-pyrite-chalcopyrite veining.

Cautionary statement: Visual estimates of mineral abundance should never be considered a proxy or substitute for laboratory analyses where concentrations or grades are the factor of principal economic interest. Visual estimates also potentially provide no information regarding impurities or deleterious physical properties relevant to valuations.

A summary of visual estimates of logged mineralisation has been included as Appendix 3. Assay results for these outstanding holes are expected in May 2025.

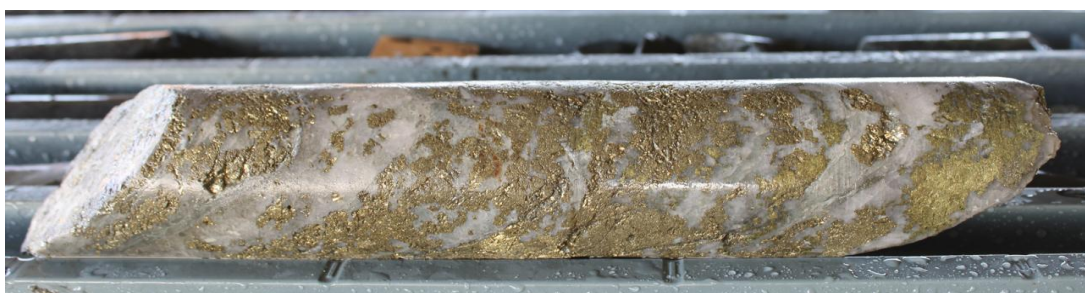


Figure 7 – Quartz lode in Dittmer drill hole DTDD056 (143.5 – 143.8m) exhibiting significant chalcopyrite-pyrite mineralisation.

About Dittmer Project

The Dittmer Project is located 20 km west of the regional centre of Proserpine in North Queensland and consists of two granted MLs and three granted EPMs over an area of 488 km². The project encompasses the historic Dittmer Mine which was the largest operation in the region and exploited the Duffer Reef. After its discovery in 1934, it became one of the highest-grade gold mines in Queensland. From 1935 to 1951 it produced over 54,500 oz of gold (1,696 kg), 23,400 oz of silver (728 kg) and 295 long tons of copper (300 t) from 17,100 long tons of ore at an average mined grade of **151.1g/t Au 66.8g/t Ag and 2.8% Cu** (after hand-picking). The mine also operated sporadically from 1951 through to 1984 but mine records are not available for these latter periods.

The project has numerous gold and copper targets ranging from high-grade historic gold mines such as the Dittmer Mine and the Mount Hector Goldfield, to large porphyry copper deposits such as Andromache. The Dittmer Mine area had never been drill tested before Ballymore acquired the Dittmer tenements in 2020 and drilling by the Company has recognised that the historically mined Duffer Lode has been displaced at depth with a repetition identified within 30m of the historic mine workings. Ballymore is systematically applying modern exploration methods to test these historic gold fields with the aim of identifying extensions to the historic workings that provide bulk gold and copper targets.

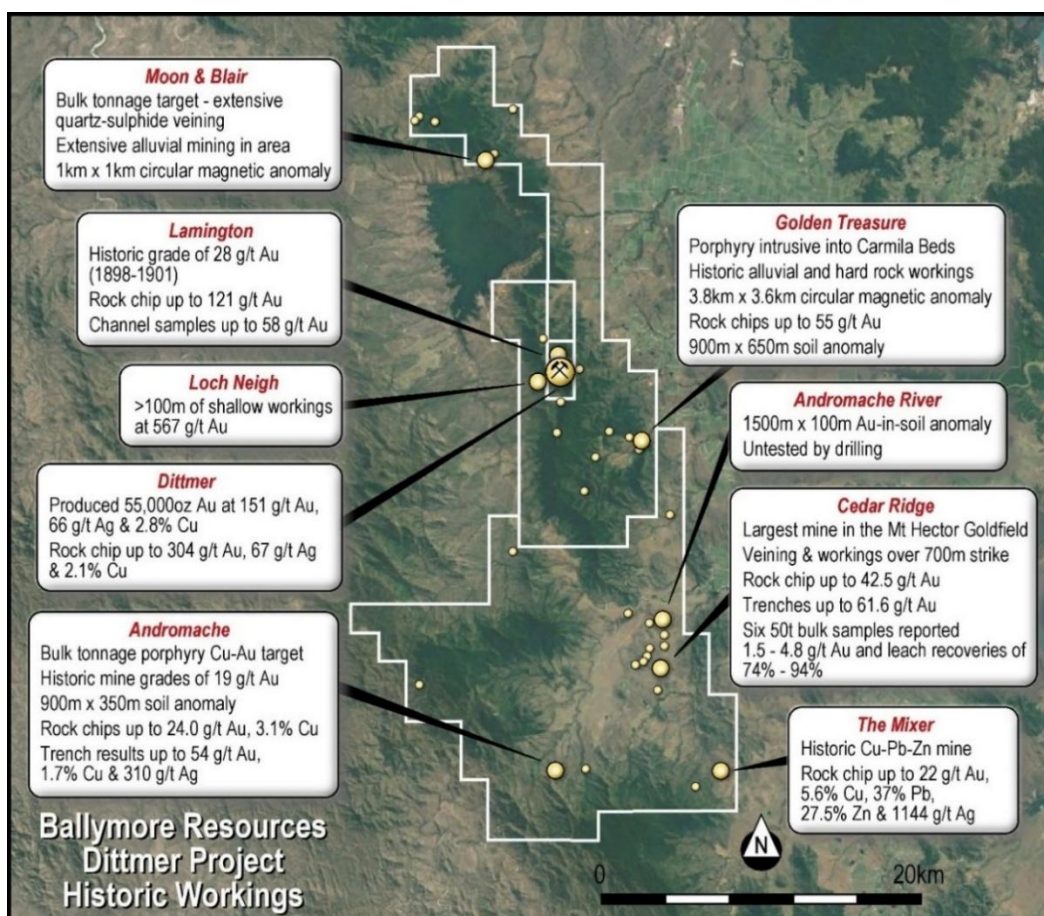


Figure 8 – Dittmer Project key targets.

Planned Activities

The Company is well funded with substantial work programs planned for 2025. Planned works include the following:

- May 2025 Complete technical review of Maniopota airborne EM survey data (Ruddygore Project)
- May 2025 Receive Dittmer metallurgical results (Dittmer Project)
- May 2025 Complete Dittmer Stage 5 underground drilling program (Dittmer Project)
- July 2025 Noosa Mining Investor Conference

Approved by the Board of Ballymore Resources Limited.

For further information:

David A-Izzeddin

Managing Director

daizzeddin@ballymoreres.com

Gareth Quinn

Media and Investor Relations

gareth@republicir.com.au

0417 711 108

Competent Persons Statement

The information in this announcement that relates to Exploration Results is based on, and fairly represents, information compiled or reviewed by Mr David A-Izzeddin. Mr A-Izzeddin is a Member of The Australasian Institute of Geoscientists and is a Director and an employee of the Company. Mr A-Izzeddin has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr A-Izzeddin consents to the inclusion in the announcement of the matters based on his information in the form and context in which it applies. The Exploration Targets described in this announcement are conceptual in nature and there is insufficient information to establish whether further exploration will result in the determination of Mineral Resources.

Forward-Looking Statements


Certain statements made during or in connection with this statement contain or comprise certain forward-looking statements regarding the Company's Mineral Resources, exploration operations and other economic performance and financial conditions as well as general market outlook. Although the Company believes that the expectations reflected in such forward-looking statements are reasonable, such expectations are only predictions and are subject to inherent risks and uncertainties which could cause actual values, results, performance or achievements to differ materially from those expressed, implied or projected in any forward-looking statements and no assurance can be given that such expectations will prove to have been correct.

Accordingly, results could differ materially from those set out in the forward-looking statements as a result of, among other factors, changes in economic and market conditions, delays or changes in project development, success of business and operating initiatives, changes in the regulatory environment and other government actions, fluctuations in commodity prices and exchange rates and business and operational risk management. Except for statutory liability which cannot be excluded, each of the Company, its officers, employees and advisors expressly disclaim any responsibility for the accuracy or completeness of the material contained in this statement and excludes all liability whatsoever (including in negligence) for any loss or damage which may be suffered by any person as a consequence of any information in this statement or any error or omission. The Company undertakes no obligation to update publicly or release any revisions to these forward-looking statements to reflect events or circumstances after today's date or to reflect the occurrence of unanticipated events other than required by the Corporations Act and ASX Listing Rules. Accordingly, you should not place undue reliance on any forward-looking statement.

About Ballymore Resources (ASX:BMR)

Ballymore holds a portfolio of exploration and development projects in prolific Queensland mineral belts that are highly prospective for gold and base metals. These consist of two granted Mining Leases (MLs) and fourteen Exploration Permits over four project areas at Dittmer, Ruddygore, Ravenswood, Mount Molloy. The total area covered by the tenements is 1,456 km².

Known deposits in north-east Queensland include Kidston (5 Moz Au), Ravenswood/Mount Wright (5.8 Moz Au), Mount Leyshon (3.8 Moz Au), Red Dome/Mungana (3.2 Moz Au) and Mt Morgan (17 Moz Au and 239 Kt Cu). The deposits occur in a wide range of geological settings including porphyries, breccias, skarns and veins.

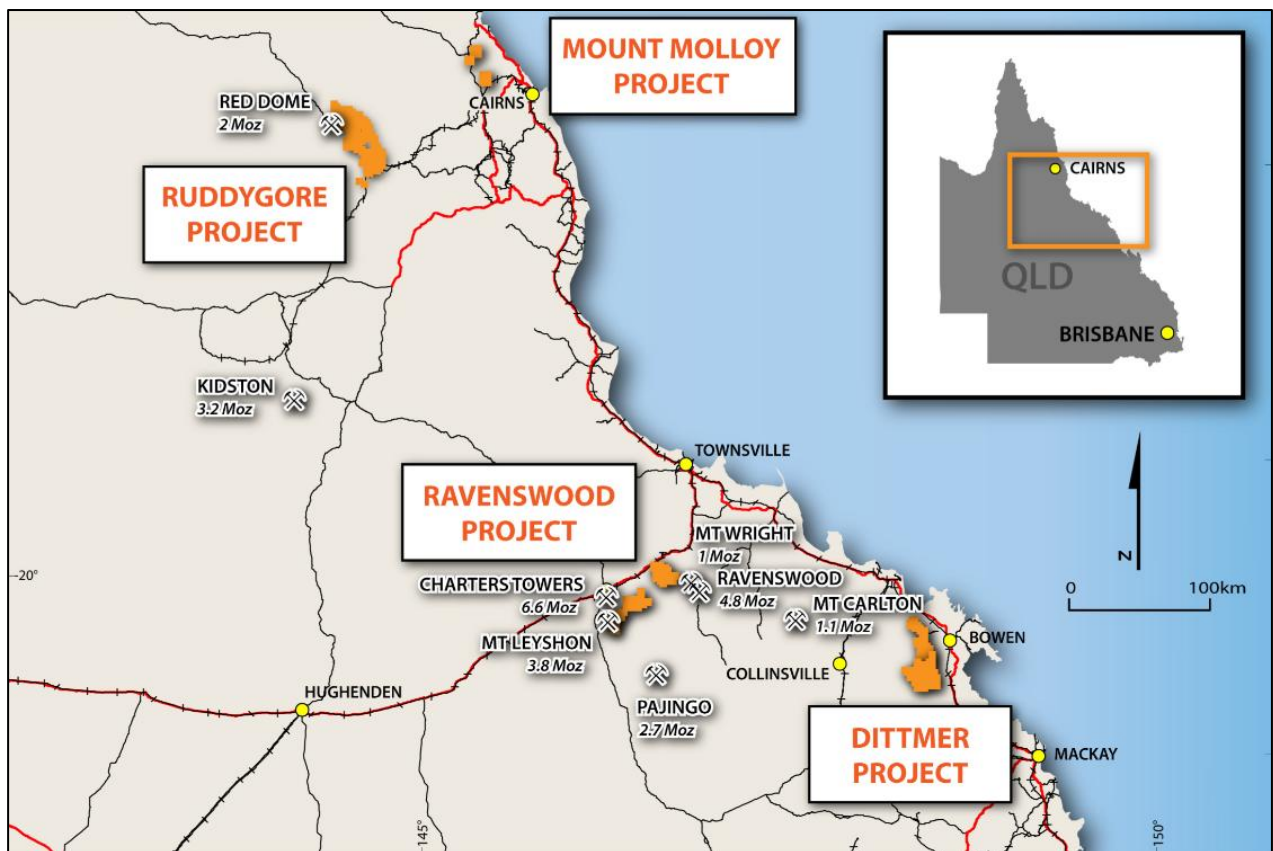

Board

Andrew Greville, Chairman
David A-Izzeddin, Managing Director
Andrew Gilbert, Director – Operations
Nick Jorss, Non-Executive Director

Head Office

Suite 606, Level 6
10 Market St Brisbane QLD 4000
Phone +617 3212 6299
ballymoreresources.com

APPENDIX 1. DITTMER – JORC CODE TABLE 1 CHECKLIST OF ASSESSMENT AND REPORTING CRITERIA

Section 1: Sampling Techniques and Data

CRITERIA	JORC Code Explanation	Commentary
SAMPLING TECHNIQUES	<ul style="list-style-type: none"> Nature and quality of sampling (e.g., cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. 	<ul style="list-style-type: none"> Exploration has been undertaken at the Project since the early 1960s. Sampling methods have included surface rock chip and trenching, soil, and stream sediment samples, together with channel samples taken from underground exposures and drillhole samples comprising diamond core samples. Geochemistry from soil and stream sediment samples is used semi-quantitatively to guide further exploration and is not used for Mineral Resource estimation. The accuracy of rock chip geochemistry is generally high, but these samples are spot samples and generally not used in Mineral Resource estimation. The accuracy of trench and channel geochemistry is generally high. These samples are regularly used in Mineral Resource estimation. The quality of RC percussion drilling is generally medium – high because the method significantly reduces the potential of contamination, unless there is a lot of groundwater or badly broken ground. Consequently, these samples can be representative of the interval drilled and can be used for Mineral Resource estimation. The quality of diamond coring is generally medium – high because the method is designed to sample the rock mass effectively in most conditions. Consequently, these samples can be representative of the interval drilled and can be used for Mineral Resource estimation.
	<ul style="list-style-type: none"> Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. 	<ul style="list-style-type: none"> No information is available or documenting measures to ensure sample representivity for surface sampling methods. These methods are not used for Mineral Resource estimation. Channel sampling is an established method designed to deliver a representative sample of the interval being sampled. RC drilling is an established method designed to minimise drilling-induced contamination of samples, aimed to deliver a representative sample of the interval being drilled. Diamond drilling is also an established method aimed at collecting representative samples of the interval being drilled. Diamond drilling is also an established method aimed at collecting representative samples of the interval being drilled.
	<ul style="list-style-type: none"> Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g., 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised 	<ul style="list-style-type: none"> Economic gold mineralisation is measured in terms of parts per million and therefore rigorous sampling techniques must be adopted to ensure quantitative, precise measurements of gold concentration. If gold is present as medium – coarse grains, the entire sampling,

CRITERIA	JORC Code Explanation	Commentary
	<p>to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g., submarine nodules) may warrant disclosure of detailed information.</p>	<p>sub-sampling, and analytical process must be more stringent.</p> <ul style="list-style-type: none"> RC drill holes were sampled as individual, 1 m length samples from the rig splitter. Individual metre samples were collected as a 12.5% split collected from the drill rig. Individual RC samples were collected in calico sample bags and grouped into polyweave bags for dispatch (approximately five per bag). Diamond drill holes were sampled as half core, with sample intervals selected by the BMR Geologist. The samples were sawn longitudinally in half using the onsite core saw.
<p>DRILLING TECHNIQUES</p>	<ul style="list-style-type: none"> Drill type (e.g., core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g., core diameter, triple or standard tube, depth of diamond tails, face-sampling bit, or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> Ballymore Surface Diamond Drilling: 2 diamond drillholes in HQ triple tube size were drilled at Dittmer (955.0 m) in 2020. All holes were oriented using an Ace instrument. Ballymore Underground Drilling: 6 diamond drillholes in NQ2 size were drilled at Dittmer (946.51m) in 2021. Another 4 diamond drillholes in NQ3 size were drilled at Dittmer (539.7m) in 2022. All holes were oriented using an ACT Mk2 instrument. Another 20 diamond drillholes in HQ3 triple tube to date have been completed in 2023 at Dittmer (3261.42m). Subsequently another 13 diamond drillholes in HQ3 triple tube to date have been completed in 2024 at Dittmer (2212.2m). All holes were oriented using an ACT Mk2 instrument. Ballymore Surface RC Drilling: 10 Reverse circulation drill holes completed at Cedar Ridge in 2024 utilising an 8inch open-hole hammer for pre-collar and a 5.5inch RC hammer for the remainder of the drill hole.
<p>DRILL SAMPLE RECOVERY</p>	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias 	<ul style="list-style-type: none"> Ballymore surface drilling: Sample recovery was measured on a per-run basis and generally reported to be greater than 95%, except where drilling in the upper, weathered, and oxidised zones. However, Ballymore also reported some core loss associated with zones of alteration and mineralisation that could result in potential for sample bias. Ballymore underground drilling: Sample recovery was measured on a per-run basis and generally reported to be greater than 99%. Ballymore RC drilling: Bulk sample bags are weighed to monitor recoveries and RC sample recoveries of less than approximately 80% are noted in the geological/sampling log with a visual estimate of the actual recovery. No such samples were reported within the significant intercept zones. Moisture categorisation was also recorded. Ballymore diamond drilling: Used chrome barrels and controlled drilling in broken ground to maximise sample recovery. In addition, triple tube is used to maximise recovery. No assessment has been completed to determine if there is a relationship between sample recovery and grade, and whether there

CRITERIA	JORC Code Explanation	Commentary
	<p>may have occurred due to preferential loss/gain of fine/coarse material.</p>	<p>is any potential for sample bias associated with the drilling methods used to date.</p>
LOGGING	<ul style="list-style-type: none"> ● Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. ● Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. ● The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> ● Ballymore Diamond drilling: Drill core was logged for lithology, structure, alteration, mineralisation, and veining, which is deemed to be appropriate for the style of mineralisation and the lithologies encountered. All core was photographed and geotechnically logged. Logging information is adequate to support Mineral Resource estimation. Information to support geotechnical studies is available. ● Ballymore Diamond drilling: Logging of core is mostly qualitative, except for some semi-quantitative logging of sulphide content, quartz veining, RQD, and geotechnical parameters. ● Ballymore RC drilling: Logging of chips is mostly qualitative, except for some semi-quantitative logging of sulphide content, quartz veining, alteration. ● Ballymore drilling: Geological logs were completed for all drilled intervals.
SUB-SAMPLING TECHNIQUES AND SAMPLE PREPARATION	<ul style="list-style-type: none"> ● If core, whether cut or sawn and whether quarter, half or all core taken. ● If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. ● For all sample types, the nature, quality, and appropriateness of the sample preparation technique. ● Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. 	<ul style="list-style-type: none"> ● Ballymore drilling: Ballymore cut core samples in half or quarter using a diamond saw and where appropriate used geological contacts or mineralisation to define sample intervals. ● RC samples were split using a rig-mounted cone splitter on 1m intervals to obtain a sample for assay, of approximate weight 3 – 5kg. ● Sample moisture was monitored, and water is blown out at each rod change prior to resuming drilling. Hole terminated if sample is wet. ● Ballymore diamond drilling: Half core was submitted to the laboratory, generally 2 – 3 kg per sample. All of the core was dried, crushed to -6 mm, then pulverised to 85% - 75 µm. This method is considered appropriate for mineralisation that may have visible gold mineralisation. ● Ballymore RC drilling: RC samples were split using a rig-mounted cone splitter on 1m intervals to obtain a sample for assay, of approximate weight 3 – 5kg. Samples were dried, crushed to -6 mm, then pulverised to 85% - 75 µm. This method is considered appropriate for mineralisation that may have visible gold mineralisation. ● Ballymore Underground Channel Sampling: Samples were collected from underground exposures across the mapped lode. Generally, 2 – 3 kg samples were collected and despatched to the laboratory. All samples were dried, crushed to -6 mm, then pulverised to 85% - 75 µm. This method is considered appropriate for mineralisation that may have visible gold mineralisation. ● Ballymore diamond drilling: Drill core samples of cut core were consistently taken from the same side of the orientation line on the core to maintain consistency. All of the sample was crushed and pulverised to maximise sample representativity. Pulverised samples were tested for compliance to grinding specifications at the rate of 1 in 40.

CRITERIA	JORC Code Explanation	Commentary
	<ul style="list-style-type: none"> Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> Ballymore RC drilling: RC samples were split using a rig-mounted cone splitter on 1m intervals to obtain a sample for assay, of approximate weight 3 – 5kg. All of the sample was crushed and pulverised to maximise sample representativity. Pulverised samples were tested for compliance to grinding specifications at the rate of 1 in 40. Ballymore Underground Channel Sampling: A diamond saw was used to cut a slot across the designated sample zone and ensure uniform sampling of the zone. All of the sample was crushed and pulverised to maximise sample representativity. Pulverised samples were tested for compliance to grinding specifications at the rate of 1 in 40. Ballymore diamond drilling: QA/QC procedures included the insertion of quarter core field duplicates at the insertion rate of 1 in 20 samples. Field blanks were also submitted to the laboratory. Ballymore RC drilling: QA/QC procedures included the insertion of field duplicates at the insertion rate of 1 in 20 samples. Field blanks were also submitted to the laboratory. Ballymore underground channel sampling: Field blanks were submitted to the laboratory Ballymore soil sampling: Field duplicates were submitted to the laboratory. No formal assessment has been undertaken to quantify the appropriate sample size required for good quality determination of gold content, given the nature of the gold mineralisation.
QUALITY OF ASSAY DATA AND LABORATORY TESTS	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. 	<ul style="list-style-type: none"> Ballymore 2021 drilling and channel sampling: ALS Townsville Laboratory was used. Gold assays were analysed with a 50 g charge used for fire assay with an ICP-AES determination. Over range gold samples (>10 ppm) were re-analysed by fire assay and gravimetric finish. In addition, a 0.25 g charge was taken for analysis for 48 elements (Ag, Al, As, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Fe, Ga, Ge, Hf, In, K, La, Li, Mg, Mn, Mo, Na, Nb, Ni, P, Pb, Rb, Re, S, Sb, Sc, Se, Sn, Sr, Ta, Te, Th, Ti, Tl, U, V, W, Y, Zn, Zr) utilising a four-acid digest with an ICP-MS determination. Any over range Cu (>10000 ppm) and Ag (>100 ppm) was re-analysed using a standard Ore Grade method utilising a four-acid digest producing a volumetrically precise digest analysed with an ICP-AES finish for high detection limits. The fire assay method for gold using either a 30 g or 50 g charge is an appropriate assay method and is normally considered a total assay method, except where gold grain size is very coarse. Ballymore 2022, 2023 & 2024 drilling: Intertek Townsville Laboratory was used. Gold assays were analysed with a 50 g charge used for fire assay with an ICP-AES determination. In addition, a 0.25 g charge was taken for analysis for 48 elements (Ag, Al, As, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Fe, Ga, Ge, Hf, In, K, La, Li, Mg, Mn, Mo, Na, Nb, Ni, P, Pb, Rb, Re, S, Sb,

CRITERIA	JORC Code Explanation	Commentary
	<ul style="list-style-type: none"> For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (e.g., standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e., lack of bias) and precision have been established. 	<p>Sc, Se, Sn, Sr, Ta, Te, Th, Ti, Tl, U, V, W, Y, Zn, Zr) utilising a four-acid digest with an ICP-MS determination. Any over range Cu (>10000 ppm) was re-analysed using a standard Ore Grade method utilising a four-acid digest producing a volumetrically precise digest analysed with an ICP-AES finish for high detection limits. The fire assay method for gold using either a 30 g or 50 g charge is an appropriate assay method and is normally considered a total assay method, except where gold grain size is very coarse.</p> <ul style="list-style-type: none"> Ballymore rock chip samples were analysed at ALS Townsville or Intertek using a multi-element suite by aqua regia digestion and ICP-MS finish. For most elements, this is considered as a total analysis. Gold was analysed with a 50 g charge used for fire assay with an ICP-AES determination. Normally the gold analysis would be considered a total analysis. Ballymore soil samples were analysed at Intertek Townsville using a multi-element suite by aqua regia digestion and ICP-MS finish. For most elements, this is considered as a total analysis. <ul style="list-style-type: none"> No geophysical tools, spectrometers, or handheld XRF instruments have been used to date to determine chemical composition at a semi-quantitative level of accuracy. <ul style="list-style-type: none"> Ballymore drilling: In addition to blanks and field duplicates, commercial CRMs of low grade to high grade gold ore material were prepared and certified for Au, Ag and Cu by Ore Research & Exploration Services Pty Ltd. These were incorporated into the sampling stream to achieve an overall insertion rate of 1 duplicate, blank or CRM for every 10 core samples. Ballymore Channel Sampling: In addition to blanks, commercial CRMs of low grade to high grade gold ore material were prepared and certified for Au, Ag and Cu by Ore Research & Exploration Services Pty Ltd. These were incorporated into the sampling stream to achieve an overall insertion rate of 1 blank or CRM for every 10 core samples as a minimum. Company staff routinely monitor QA/QC results and liaise with the laboratory if any dubious results are reported.
<p>VERIFICATION OF SAMPLING AND ASSAYING</p>	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. 	<ul style="list-style-type: none"> It has not been possible to independently verify significant intersections to date. There has been no use of twinned holes to date. Ballymore drilling: Primary logging data was recorded digitally onto electronic spread sheets and validated against code tables by the logging geologist. Primary analytical data was received electronically in csv file format and imported directly into an electronic assay register spread sheet. Data validation was conducted by comparing the spreadsheet data

CRITERIA	JORC Code Explanation	Commentary
LOCATION OF DATA POINTS	<ul style="list-style-type: none"> Discuss any adjustment to assay data. 	<p>against the Certificate of Analysis supplied as a secured pdf file by the laboratory.</p> <ul style="list-style-type: none"> No adjustments to assay data have been made.
	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. 	<ul style="list-style-type: none"> Underground workings: Ballymore employed a contract surveyor to survey underground workings and channel sample locations to sub-metre accuracy. Ballymore surface drilling: Drillhole collar locations were initially set out (and reported) using a handheld GPS with a location error of +/- 5m. All holes were subsequently surveyed by contract surveyor to a sub-metre accuracy, with data supplied electronically as spreadsheets and pdf files. The azimuth and dip at the start of the hole was recorded using a line of sight Suunto compass and Suunto clinometer by the site geologist. The orientation and dip of drillholes are measured with downhole surveys @ 15 m, 30 m, then every 30 m using a REFLEX single/multi-shot survey tool. End of hole surveys were also taken for each hole. At hole completion, all holes were gyro surveyed. Ballymore also employed a contract surveyor to survey the drillhole collars to sub-metre accuracy. Ballymore underground drilling: Drillhole collar locations and planned azimuth were initially set out with a surveyor marking front and back sights. Upon completion, all underground drill holes were subsequently surveyed by contract surveyor to a sub-metre accuracy, with data supplied electronically as spreadsheets and pdf files. The azimuth and dip at the start of the hole was using a REFLEX single/multi-shot survey tool and verified by the site geologist. The orientation and dip of drillholes are measured with downhole surveys @ 15 m, 30 m, then every 30 m using a REFLEX single/multi-shot survey tool. End of hole surveys were also taken for each hole. At hole completion, all holes were gyro surveyed.
	<ul style="list-style-type: none"> Specification of the grid system used. 	<ul style="list-style-type: none"> The co-ordinate system used is MGA94 zone 55 Datum.
	<ul style="list-style-type: none"> Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> Quality of the surface topographic control data is poor and is currently reliant on public domain data.
DATA SPACING AND DISTRIBUTION	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. 	<ul style="list-style-type: none"> The Dittmer mine or Cedar Ridge prospect has not been previously drilled and the initial Ballymore drillholes were sited to test beneath historic workings and not conducted in a regular grid type pattern. The steep terrain has also impacted the siting of drill sites at Dittmer. The spacing of drillhole data is variable.
	<ul style="list-style-type: none"> Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. 	<ul style="list-style-type: none"> There are no Mineral Resources or Ore Reserves. There is insufficient drill spacing to establish the degree of geological and grade continuity appropriate for Mineral Resource and Ore Reserve estimation.

CRITERIA	JORC Code Explanation	Commentary
	<ul style="list-style-type: none"> Whether sample compositing has been applied. 	<ul style="list-style-type: none"> No sample compositing was carried out on site. For reporting purposes, some drillhole assay results have been composited together to report contiguous zones of mineralisation.
ORIENTATION OF DATA IN RELATION TO GEOLOGICAL STRUCTURE	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. 	<ul style="list-style-type: none"> Drillholes were oriented to intersect the interpreted mineralisation zones as oblique (perpendicular) as possible. Orientated drill core collected by Ballymore has confirmed the orientation of drilling. To the extent known, drilling is assumed to be unbiased.
	<ul style="list-style-type: none"> If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> No sampling bias is considered to have been introduced in drilling completed.
SAMPLE SECURITY	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<ul style="list-style-type: none"> Ballymore drilling: Drilling and sampling was supervised and undertaken by company staff. Samples were double bagged, palletised and shrink wrapped at the core shed before dispatch to the laboratory by Ballymore staff. Ballymore underground channel and rock chip sampling: Sampling was supervised and undertaken by company staff. Samples were double bagged, palletised and shrink wrapped at site before dispatch to the laboratory by Ballymore staff.
AUDITS OR REVIEWS	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> Ballymore drilling: Internal auditing procedures and reviews were regularly undertaken on sampling techniques, standard operating procedures, and laboratory processes.

Section 2: Reporting of Exploration Results

CRITERIA	JORC Code explanation	Commentary
MINERAL TENEMENT AND LAND TENURE STATUS	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. 	<ul style="list-style-type: none"> The Project tenements comprise ML 10340, ML 10341, EPM 14255, EPM 26912 and EPM 27282. All licences are 100% held by Ballymore Resources Ltd.
	<ul style="list-style-type: none"> The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> All tenements are in good standing.
EXPLORATION DONE BY OTHER PARTIES	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> ML 10341 contains the Dittmer Mine, which worked the Duffer Lode from 1935 to 1951 and again from 1968 to 1970 to produce some 54,500 oz Au. Previous exploration across the EPMs includes stream sediment sampling, geological mapping, soil sampling and geophysical surveys. The main exploration companies active in the area were CRA Exploration, St. Joseph Phelps Dodge Exploration, Carpentaria Exploration Co, Mines Administration, Buddha Gold Mines in joint venture with Homestake Gold, and Loch Neigh Gold.
GEOLOGY	<ul style="list-style-type: none"> Deposit type, geological setting, and style of mineralisation. 	<ul style="list-style-type: none"> The Dittmer district is dominated by three main tectonostratigraphic sequences – Carboniferous

CRITERIA	JORC Code explanation	Commentary
		<p>intrusives, Permian volcanics and sediments, and Cretaceous intrusives.</p> <ul style="list-style-type: none"> Mineralisation is considered to be of IRGS style, with deposits often formed in structurally active areas where large crustal steep faults are intersected by other structures to produce active dilatant sites and deep plumbing systems during periods of intrusion and hydrothermal activity.
DRILL HOLE INFORMATION	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> Easting and northing of the drill hole collar. Elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar. Dip and azimuth of the hole. Down hole length and interception depth. Hole length. 	<ul style="list-style-type: none"> Refer to Appendix 2.
	<ul style="list-style-type: none"> If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> Refer to Appendix 2.
DATA AGGREGATION METHODS	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g., cutting of high grades) and cut-off grades are usually Material and should be stated. 	<ul style="list-style-type: none"> The mineralised drill intersections are reported as downhole intervals and were not converted to true widths. True widths may be up to 50% less than drill intersections pending confirmation of mineralisation geometry. No capping of high grades was performed in the aggregation process.
	<ul style="list-style-type: none"> Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. 	<ul style="list-style-type: none"> The drill intercepts reported were calculated using a 0.1, 0.5, 1.0 and 10.0 g/t Au cut-off grade. Gold grade for the intercept was calculated as a weighted average grade. Up to 2 m (down hole) of internal waste (< 0.5 g/t Au) was included in some cases.
	<ul style="list-style-type: none"> The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> No metal equivalents are reported.
RELATIONSHIP BETWEEN MINERALISATION WIDTHS AND INTERCEPT LENGTHS	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. 	<ul style="list-style-type: none"> No local grid has been applied. The Duffer Lode at Dittmer strikes roughly north-south. The Cedar Ridge veins strike north-northwest.
	<ul style="list-style-type: none"> If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. 	<ul style="list-style-type: none"> Drillholes were generally oriented perpendicular to the strike of the shear zone and veins and angled in order to intersect the moderately dipping mineralised zones at a high angle.
	<ul style="list-style-type: none"> If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g., 'down hole length, true width not known'). 	<ul style="list-style-type: none"> The mineralised intercepts generally intersect the interpreted dip of the mineralisation at a high angle but are not true widths.
DIAGRAMS	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> Refer to figures contained within this report.
BALANCED REPORTING	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> Balanced reporting of Exploration Results is presented within this report.

CRITERIA	JORC Code explanation	Commentary
OTHER SUBSTANTIVE EXPLORATION DATA	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> The Project includes exploration data collected by previous companies, including regional stream sediment geochemical data, soil sample and rock chip data, geological mapping data, drilling data, geophysical survey data, and costean data. Much of this data has been captured and validated into a GIS database. Previous mining has been limited and involved very selective mining and hand sorting. No systematic data has historically been collected to assess metallurgy and mining parameters relevant to a modern operation. Metallurgical tests of selected mineralised drill core and stope backfill material from the Dittmer mine, including cyanide leach testwork, floatation testwork and gravity concentration tests were conducted by Ballymore in 2023. Cyanide leach testing work produced positive results ranging between 79% and 99%. Rougher flotation tests have reported positive results of 87.9% Au, 91.5% Ag and 85.0% Cu. Gravity concentration test work has also shown promise with gold recovery of 32.0% in Knelson and tabling concentration with an upgrade from 9.1g/t to 113.0g/t for the primary ore. Further metallurgical work is warranted.
FURTHER WORK	<ul style="list-style-type: none"> The nature and scale of planned further work (e.g., tests for lateral extensions or depth extensions or large-scale step-out drilling). 	<ul style="list-style-type: none"> Ballymore plans to conduct surface geological mapping and geochemistry, geophysics surveys and drilling across various high-priority target areas over the next two years. In addition, the Company will continue to refurbish and dewater the Dittmer mine and assess options to recommence production.
	<ul style="list-style-type: none"> Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> Refer to figures contained within this report.

APPENDIX 2. DITTMER STAGE 5 DRILL COLLAR AND SURVEY INFORMATION

Company	Target	HoleID	Hole Type	East (MGA)	North (MGA)	RL	Depth (m)	Dip (°)	Azimuth (° MGA)	Licence	Year
Ballymore	Dittmer	DTDD049*	Diamond	645649	7738084	139	200.6	-54	195	ML 10341	2025
Ballymore	Dittmer	DTDD050*	Diamond	645649	7738084	139	220	-44	191	ML 10341	2025
Ballymore	Dittmer	DTDD051*	Diamond	645649	7738084	139	234.5	-66	219	ML 10341	2025
Ballymore	Dittmer	DTDD052*	Diamond	645649	7738084	139	250.5	-72	217	ML 10341	2025
Ballymore	Dittmer	DTDD053*	Diamond	645649	7738084	139	167.9	-68	62	ML 10341	2025
Ballymore	Dittmer	DTDD054*	Diamond	645649	7738084	139	157	-46	61	ML 10341	2025
Ballymore	Dittmer	DTDD055*	Diamond	645649	7738084	139	211.3	-62	30	ML 10341	2025
Ballymore	Dittmer	DTDD056*	Diamond	645649	7738084	139	236,5	-39	193	ML 10341	2025

* Drill hole collar location estimated and yet to be picked up by surveyor

APPENDIX 3. DITTMER STAGE 5 DRILL HOLES DTDD052 – 056 VISUAL MINERAL ESTIMATES⁶

Hole ID	From	To	Interval (m)	Quartz (%)	Carbonate (%)	Pyrite (%)	Chalcopyrite (%)	Laumontite (%)
DTDD052	76	77	1		1	1		
DTDD052	77	78	1		2	1		
DTDD052	78	79	1		2	1		
DTDD052	79	80	1		2	1		
DTDD052	80	81	1		2	1		
DTDD052	81	82	1		2	1		
DTDD052	82	83	1		2	1		
DTDD052	83	84	1		2	1		
DTDD052	84	85	1		1			
DTDD052	85	86	1		1			
DTDD052	144	145	1		1			
DTDD052	145	146	1		1			
DTDD052	146	147	1		1			
DTDD052	147	148	1		1			1
DTDD052	148	149	1		1			1
DTDD052	149	150.1	1.1	1	5	1	1	
DTDD052	150.1	151	0.9		2	1		2
DTDD052	151	152	1		3			2
DTDD052	152	153	1		2	1		
DTDD052	153	154	1		1	1		
DTDD052	154	155	1		1	1		
DTDD052	155	156	1		1	1		1
DTDD052	156	156.7	0.7		1	1		1
DTDD052	156.7	157.7	1		2	1		2
DTDD052	157.7	158.6	0.9	3	2	2	1	2
DTDD052	158.6	159.4	0.8	1	2	1		2
DTDD052	159.4	160.4	1	4	2	4		
DTDD052	160.4	161.3	0.9	1	1	1		1
DTDD052	161.3	162.3	1	1		1		1
DTDD052	162.3	163.3	1		1	1		1
DTDD052	163.3	164.3	1		1	1		1
DTDD052	164.3	165.3	1		1	1	1	1
DTDD052	165.3	166.1	0.8		2	1		3
DTDD052	166.1	167	0.9		2	1		2
DTDD052	167	168	1		1	1		1

⁶ **Cautionary statement:** Information in this announcement contains references to visual results. The Company draws attention to the inherent uncertainty in reporting visual results. Visual estimates of mineral abundance should never be considered a proxy or substitute for laboratory analyses where concentrations or grades are the factor of principal economic interest.

Hole ID	From	To	Interval (m)	Quartz (%)	Carbonate (%)	Pyrite (%)	Chalcopyrite (%)	Laumontite (%)
DTDD052	168	169	1		1			
DTDD052	169	170	1		1			
DTDD052	215	216	1		1			1
DTDD052	216	217	1		1			
DTDD052	217	218	1		1			
DTDD052	218	219	1	1	1			
DTDD052	219	220	1		1			
DTDD052	220	221	1		1			
DTDD052	221	221.5	0.5	1	3			
DTDD052	221.5	222.4	0.9	1	3			
DTDD052	222.4	223	0.6		2			
DTDD052	223	224	1		1			
DTDD052	224	225	1		1			
DTDD052	225	226	1		2			
DTDD052	226	227.1	1.1		2			
DTDD052	227.1	228	0.9		2			
DTDD052	228	229	1		2			
DTDD052	229	230	1		6	2		
DTDD052	230	231	1		3			1
DTDD052	231	232	1	1	1			
DTDD052	232	232.8	0.8	1	2			
DTDD052	232.8	233.2	0.4	4	4	2		
DTDD052	233.2	234	0.8		1			
DTDD052	237	238	1		1			
DTDD052	238	239	1		1			
DTDD052	239	240	1		1			
DTDD052	240	241	1		1	1		
DTDD052	242	243	1			1		
DTDD052	243	244	1		1			
DTDD052	244	245	1		1	1		
DTDD052	245	246	1		1			
DTDD052	246	247	1		1			
DTDD052	247	248	1		1	1		
DTDD052	248	249	1		1			
DTDD052	249	250	1		1			
DTDD052	250	250.5	0.5		1			
DTDD053	94.3	95.35	1.05		2			1
DTDD053	95.35	96.35	1		2			1
DTDD053	96.35	97	0.65	5		5	2	1
DTDD053	99	99.9	0.9		10	5		
DTDD053	99.9	100.7	0.8		1	2		
DTDD053	100.7	101.2	0.5		1	5		

Hole ID	From	To	Interval (m)	Quartz (%)	Carbonate (%)	Pyrite (%)	Chalcopyrite (%)	Laumontite (%)
DTDD053	101.2	101.7	0.5	10		20	5	
DTDD053	101.7	102.7	1		1	5		
DTDD053	102.7	103.7	1		1	2		
DTDD053	103.7	104.7	1		1	2		
DTDD053	104.7	105.7	1		1	2		
DTDD053	105.7	106.7	1		1	2		
DTDD053	124.7	125.7	1		2			2
DTDD053	125.7	126	0.3			4		
DTDD053	126	127	1					
DTDD053	133.05	133.95	0.9		1			1
DTDD053	133.95	134.5	0.55		1		1	1
DTDD053	134.5	135.5	1		1		1	1
DTDD053	135.5	136.5	1		1		1	1
DTDD053	136.5	136.8	0.3	30		20	10	
DTDD053	136.8	137.8	1		1			
DTDD053	137.8	138.8	1		1			
DTDD053	145	146	1		1			
DTDD053	153	154	1		1		1	1
DTDD053	154	155	1		1			1
DTDD054	97.25	98.25	1	5		10		
DTDD054	98.25	99.2	0.95	5		10		
DTDD054	99.2	100	0.8	10		10	2	
DTDD054	101	101.4	0.4		5	3		5
DTDD054	101.4	101.9	0.5		5	3		5
DTDD054	102	102.3	0.3		1			1
DTDD054	102.4	102.8	0.4		1			1
DTDD054	102.9	103.9	1		1			1
DTDD054	103.9	104.3	0.4		1			1
DTDD054	105	106	1		1			1
DTDD054	123	124	1		1			1
DTDD054	124	125	1		2			2
DTDD054	127.35	127.65	0.3		5			5
DTDD054	127.65	128.18	0.53	30		15	15	
DTDD054	130	131	1		1			
DTDD054	131	132	1		1			
DTDD055	120	121	1		1			
DTDD055	121	121.8	0.8		1	1	1	
DTDD055	121.8	122.8	1		1	1		
DTDD055	122.8	124	1.2		1	1		
DTDD055	124	125	1		1			
DTDD055	125	126	1		1			
DTDD055	126	127	1		1	1		

Hole ID	From	To	Interval (m)	Quartz (%)	Carbonate (%)	Pyrite (%)	Chalcopyrite (%)	Laumontite (%)
DTDD055	127	127.5	0.5		1			
DTDD055	127.5	128	0.5		1			
DTDD055	128	129	1		1			
DTDD055	129	129.9	0.9		1			
DTDD055	129.9	130.7	0.8		1			
DTDD055	130.7	131.6	0.9		1			
DTDD055	131.6	132	0.4		2			4
DTDD055	132	133	1		2			5
DTDD055	133	134	1		1			2
DTDD055	134	135	1	1	1	1		
DTDD055	135	136	1		1			
DTDD055	136	137	1			1		1
DTDD055	137	138	1		1	1		
DTDD055	138	139	1	25		5		
DTDD055	139	140	1	2	2	4		
DTDD055	140	141	1		2			3
DTDD055	141	142	1		2			3
DTDD055	142	143	1		1			2
DTDD055	143	144	1		1	1		1
DTDD055	144	145	1		1	1	1	1
DTDD055	145	146	1		1			1
DTDD055	146	147	1		1			1
DTDD055	147	148	1		2	1		2
DTDD055	148	149	1		1			1
DTDD055	149	150	1		1			1
DTDD055	150	151	1		1			
DTDD055	151	151.5	0.5		1			
DTDD055	151.5	152.4	0.9		1			
DTDD055	152.4	153.4	1	1	2	2	2	2
DTDD055	153.4	154.5	1.1		1			
DTDD055	154.5	155.5	1		1			
DTDD055	155.5	156.5	1	1	1	1	1	
DTDD055	156.5	157.5	1		1			
DTDD055	157.5	158	0.5		1			
DTDD055	158	159	1					2
DTDD055	159	160	1		1			
DTDD055	167.5	168.4	0.9	1	1	1		
DTDD055	168.4	169.5	1.1		1			
DTDD055	169.5	170.4	0.9	2	1	2	1	
DTDD055	170.4	171	0.6		1			
DTDD055	171	172	1		1			
DTDD055	172	173	1		1			

Hole ID	From	To	Interval (m)	Quartz (%)	Carbonate (%)	Pyrite (%)	Chalcopyrite (%)	Laumontite (%)
DTDD055	173	174	1	1	1	1	1	
DTDD055	174	175	1		1			
DTDD055	175	176	1		1			
DTDD055	176	177	1		1	1		
DTDD055	177	178	1		1			
DTDD055	178	179	1		2			2
DTDD055	179	180	1		1			
DTDD055	180	181	1		1	1		
DTDD055	181	182	1		1	1	1	
DTDD055	182	183	1		1			1
DTDD055	183	184	1		1			
DTDD055	184	185	1		1			
DTDD055	185	186	1		1			
DTDD055	186	186.5	0.5		1	1	1	
DTDD055	186.5	187	0.5		1			
DTDD055	187	188	1		1			
DTDD056	122.15	122.55	0.4		2			2
DTDD056	124.3	125.1	0.8			1		
DTDD056	125.1	125.55	0.45			1		
DTDD056	125.55	126.4	0.85			1		
DTDD056	139.4	140.4	1		1			1
DTDD056	140.4	141.35	0.95		1			1
DTDD056	142.5	143.5	1			1		
DTDD056	143.5	143.9	0.4	50		30	10	
DTDD056	143.9	144.45	0.55			5		
DTDD056	144.45	145	0.55		3			
DTDD056	145	146	1		3			
DTDD056	146	147	1		3			
DTDD056	147	148	1		3			
DTDD056	148	149	1		3			
DTDD056	149	150	1		3			
DTDD056	150	150.6	0.6		3			
DTDD056	150.6	151.5	0.9			1		
DTDD056	151.5	152	0.5		2			2
DTDD056	152	153	1		2			2
DTDD056	154	155	1		2			2
DTDD056	155	156	1		2			2
DTDD056	156	157	1		2	1		2
DTDD056	157	158	1		5			5
DTDD056	158	158.6	0.6		1			
DTDD056	158.6	159.2	0.6		2	1		
DTDD056	159.2	160	0.8		2	5	1	

Hole ID	From	To	Interval (m)	Quartz (%)	Carbonate (%)	Pyrite (%)	Chalcopyrite (%)	Laumontite (%)
DTDD056	160	161	1		3	5	1	
DTDD056	161	162	1	2	1	5	1	
DTDD056	162	162.6	0.6		2	5	1	
DTDD056	162.6	163.4	0.8		1			
DTDD056	163.6	164.5	0.9		1			
DTDD056	164.5	165.5	1		1			
DTDD056	165.5	166.5	1		1			
DTDD056	166.5	167.5	1		1			
DTDD056	211.6	212.05	0.45		1			
DTDD056	215.3	215.7	0.4		3			
DTDD056	231.1	231.7	0.6			1		
DTDD056	231.7	232.6	0.9			1		
DTDD056	232.6	233.6	1			1		
DTDD056	233.6	234.6	1		1			
DTDD056	234.6	235.6	1		1			
DTDD056	235.6	236.2	0.6		1			